



Multi Blind Rivet AL **BHMDAP**

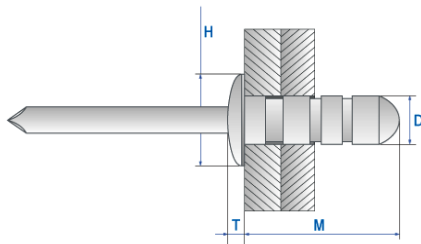

H = Head Diameter
T = Head Thickness
M = Length
D = Rivet Diameter

*Dimensions in millimeters

| Part Number | | Rivet Diameter (D) nom. | Hole Size | Length (M) max. | Grip Range | Head Diameter (H) | Head Thickness (T) ± 0.3 | Standard Strength (N) typ. | |
|---------------|--|-------------------------|-----------|-----------------|------------|-------------------|--------------------------|----------------------------|---------|
| | | | | | | | | Shear | Tensile |
| BHMDAP-064130 | | 6.3~ | 6.6~ | 18.0 | 1.6~4.8 | 12.4~ | 2.5 | 2.5 | 3.0 |
| BHMDAP-064250 | | 6.5 | 6.8 | 30.0 | 4.0~17.0 | 13.2 | | | |